


Ahuja introduces a compact and sleek eight channel audio splitter model DA-88. It splits a balanced stereo/mono line level signal into 4 stereo or 8 mono balanced line level outputs. DA-88 facilitates paralleling of a large number of PA amplifiers / boosters. It accepts both balanced as well as unbalanced line level signals.

Features

- Compact and rugged professional line level signal splitter.
- Designed for use in a wide variety of indoor and outdoor PA applications.
- Accepts Line Level Stereo as well as Mono inputs through F/XLR connector as well as 1/4" Stereo Jack.
- Splitter provides four stereo balanced outputs or eight mono balanced outputs through M/XLR connectors.
- Individual volume control for each input & output channel.
- Separate clip LED indicator for Left and Right input signal.
- Easy to operate Stereo/Mono push switch provided on front panel.
- Operates on AC mains.
- 19" rack mountable in 1U size and usable as a table top unit also.

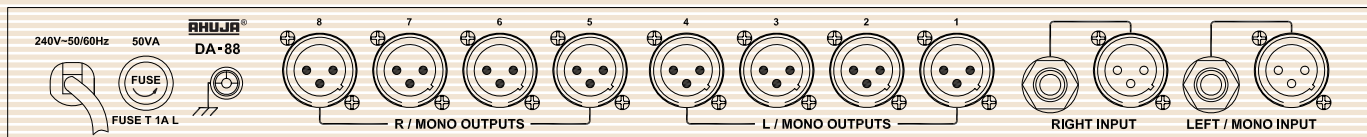

Rear Panel

Specifications

Output Channels	8 × 1V / 50Ω Balanced
Input Channels	2 × 100mV / 20kΩ Balanced
Frequency Response	20 – 20,000Hz
Distortion	0.1%
Signal to Noise Ratio	70dB
Indications	Power ON LED 2 x Clip LED (4dB prior to true clip)
Power Supply	AC: 220 - 240V 50 / 60Hz
Dimensions	W483 × H52 × D195 mm
Weight	2.80kg approx.

Design and Specifications are subject to change without notice owing to continuous product up-gradation. Technical specifications are subject to production tolerances. We cannot be held responsible for printing errors, should they occur. AHUJA is a registered trademark of Ahuja Radios in India and other countries. © Copyright Ahuja Radios, 2016. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law. No part of this compilation may be reproduced in any manner or translated without written permission.