


# Paging Systems

## SSW-16M 16 Channel Zone Selector

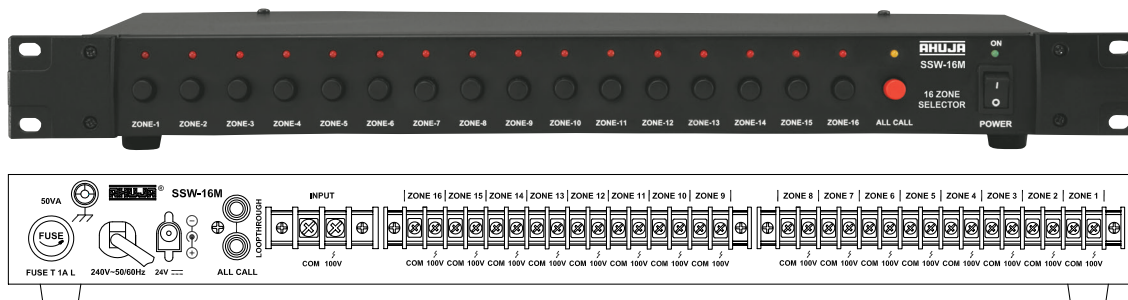

Compact and reliable manual zone selector with provision for switching a 100V audio signal to one or more of upto 16 zones.

- 1 x 100V Input, 16 x 100V Outputs, Manually Switchable.
- When multiple units of SSW-16M are used, ALL CALL activation is possible from any one SSW-16M, by using LOOP THROUGH facility.
- Built in relay for ALL CALL.
- LED indication of selected zones.

### SPECIFICATIONS

|              |   |
|--------------|---|
| INPUT        | 1 x 100V (nominal)                                      |
| OUTPUTS      | 16 x 100V (nominal)                                     |
| SWITCHES     | 16 Zone Selector switches, plus ALL CALL, Power ON/OFF. |
| POWER SUPPLY | AC 220-240V, 50/60Hz ; DC 24V (2 x 12V Car Battery)     |
| DIMENSIONS   | W483 × H53 × D180 mm                                    |
| WEIGHT       | 2.73kg  |