


## SK-15FR<sup>®</sup>X/SK-15FR<sup>®</sup>Z

High efficiency 15" dual cone full range speaker  
200 WATTS

- 30.48cm (12") dual cone speaker with wide spectrum frequency response.
- High quality specially designed imported cones and spider for extremely clear, low distortion sound reproduction.
- Impedance of DX12-F200 is 8Ω and DZ12-F200 is 16Ω.
- 5.08 cm (2") CCAW voice coil with high temperature rating for safe, reliable operation.

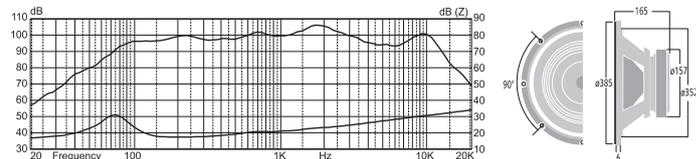

SPECIFICATIONS	SK-15FR <sup>®</sup> X/SK-15FR <sup>®</sup> Z
POWER RATING	200W RMS/400W Programme
NOMINAL DIAMETER	380mm (15")
NOMINAL IMPEDANCE	8Ω/16Ω
SENSITIVITY (1W/1m)	98 dB
MAGNET WEIGHT	1.54kg
RESONANT FREQUENCY (Fs)	75Hz
DC RESISTANCE (Re)	6.5Ω/11.0Ω
ELECTROMAGNETIC Q (Qes)	0.91
MECHANICAL Q (Qms)	5.07
TOTAL Q (Qts)	0.77
COMPLIANCE EQUIVALENT VOLUME (VAS)	75.11Litr
SURFACE AREA OF CONE (Sd)	830cm <sup>2</sup>
REFERENCE EFFICIENCY (ηo)	3.18%
VOICE COIL DIAMETER	2.0"
OVERHANG (Xmax)	4.0 mm
MOVING MASS (Mms)	60.62gm
BL PRODUCT (BL)	14.23TM
COIL INDUCTANCE (Le)	0.78mH
OVERALL DIAMETER	385 mm
DEPTH	165 mm
BAFFLE HOLE DIAMETER	355 mm
BOLT MOUNT DIAMETER (PCD)	373 mm (8 Bolts)
WEIGHT	4.90kg