

Ahuja introduces an elegant and compact volume controller for 100V line signals. It enables the user to conveniently adjust the volume of a speaker with power rating up to 6 Watts.


Features

- Attractive, aesthetically pleasing white plastic housing.
- Simple to install on walls, partitions and panels, even after the installation wiring is complete.
- Can be mounted on a wall. Can also be mounted (with its plastic rear housing removed) on a standard electrical junction box pre-fitted on a wall.
- Compatible with all Ahuja wall and ceiling speakers (which have 100V line matching transformer and power rating up to 6 Watts).
- Reliable, high wattage rotary switch with 5 selectable positions : Max, 3 attenuated positions (in 3 dB steps) & OFF.
- Ideal for hotels, office cabins, showrooms, greenrooms, etc.


Specifications

Rated Power	6W
Input Voltage	100V
Output Positions	Max, 3 attenuation positions in 3dB steps (-3dB to -9dB) and OFF
Dimensions	W87 × H87 × D78 mm
Weight	0.15kg


Connection Diagram

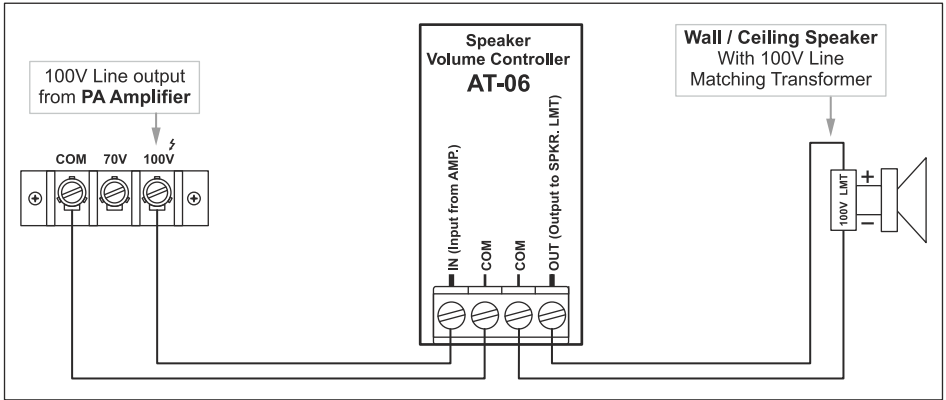

Mounting Options

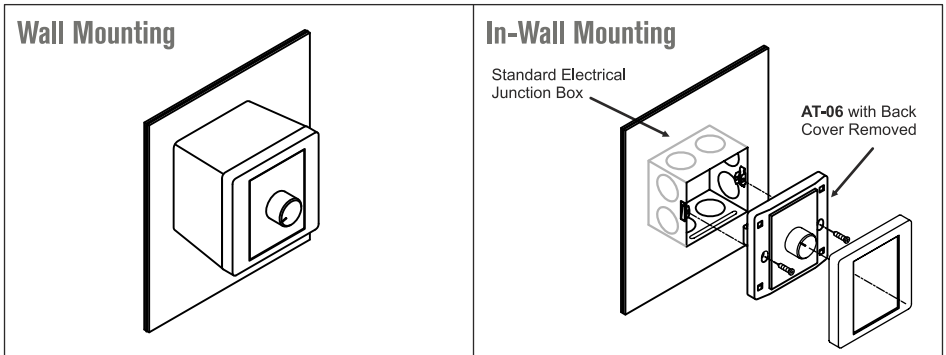

Assembly Diagram

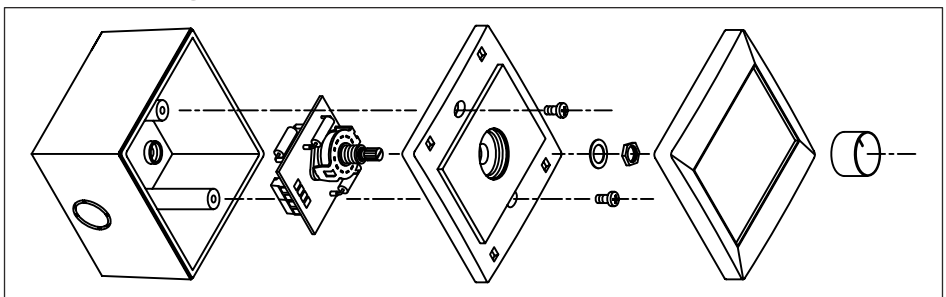

Design and Specifications are subject to change without notice. • **AT-06** is a registered trademark of Ahuja Radios in India and other countries.
© Copyright Ahuja Radios, 2010. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law.
No part of the compilation may be reproduced in any manner or translated without written permission.