



**Ultra Compact - Easy Mount 3" Ceiling Speaker****Features**

- 100V Line Technique
- 3" Full Range Speaker
- 3 Wattage Tappings (6, 3 & 1.5W)
- Suitable for Speech & Background Music
- Ideal for Boutique, Shops, Hotel Rooms etc.
- Easy Mounting with Spring Mounting Clamps
- Compact size to fit in almost any location especially where space is limited



## Connection Diagram

# PF-3B03T

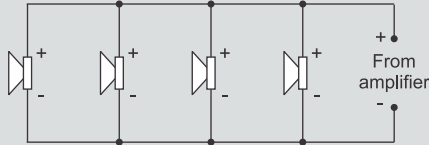


👉 100V Line System must always be wired in parallel.

**Note:** The total load presented to the amplifier must not exceed the rated output of the amplifier or damage can result.



## Dimensions

👉 Cut out size required  $\varnothing 85\text{mm}$ .

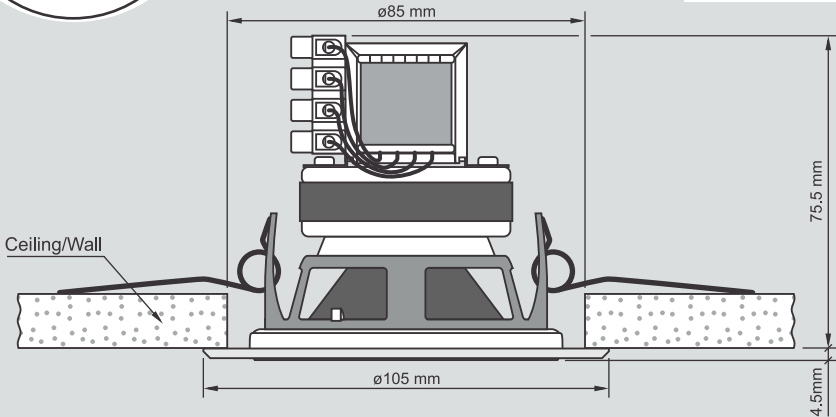

## Specifications

<b>Power</b>	6W	<b>Speaker</b>	3" Full Range
<b>Rated Voltage</b>	100V	<b>Dimensions</b>	$\varnothing 105 \times 80$ mm
<b>Power Taps</b>	6 / 3 / 1.5W	<b>Cut-out Dia</b>	$\varnothing 85$ mm
<b>Frequency Response</b>	70 - 15,000Hz	<b>Weight</b>	0.47 kg approx.

Design and Specifications are subject to change without notice owing to continuous product up-gradation. Technical specifications are subject to production tolerances. We cannot be held responsible for printing errors, should they occur. AHUJA is a registered trademark of Ahuja Radios in India and other countries.

© Copyright Ahuja Radios, 2013. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law.

No part of this compilation may be reproduced in any manner or translated without written permission.

## AHUJA RADIOS

E. & O. E. 3K/12/13/R2

215, Okhla Industrial Estate, New Delhi-110020, INDIA

C-45, Phase-II, Noida-201305 (UP) INDIA ● 3, Okhla Industrial Estate, New Delhi-110020 INDIA

Tel.: +91-11-26831549, 41612474 Fax: +91-11-26847287 E-mail: ahuja@ahujaradios.com

Website: www.ahujaradios.com