


Hallmark of Reliability!

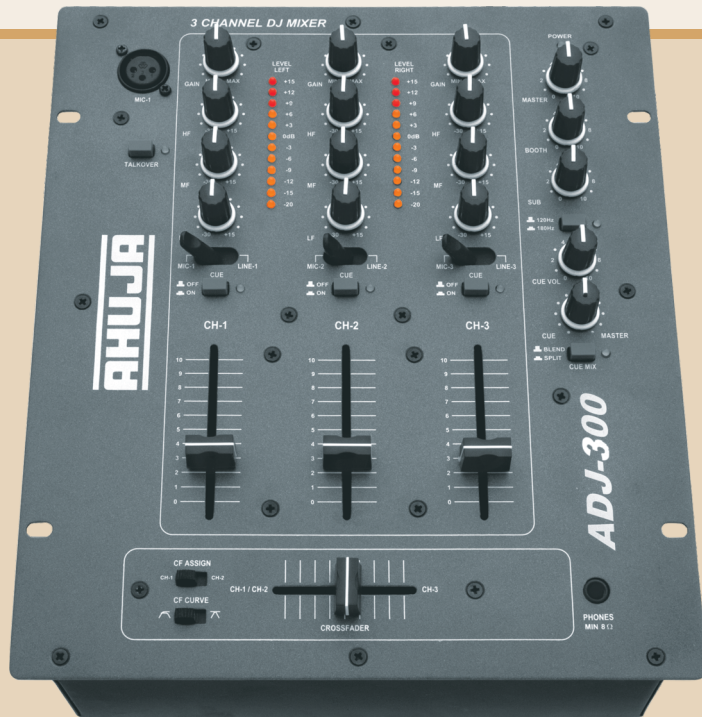

“ Ahuja introduces a high performance Professional DJ Mixer ADJ-300 with innovative and user-friendly features. It is designed for exceptional sound quality & superior reliability in both monitoring and live sound applications. Ideal for all types of DJ and Music programmes. ”

- Rugged, reliable and easy to operate 3-channel DJ mixer.
- Three MIC inputs alternate to three stereo LINE/CD inputs.
- MIC-1 is balanced XLR input with TALKOVER priority over other inputs.
- Each channel has a GAIN control, 3 band active EQ, MIC/LINE selector switch, CUE ON/OFF switch and channel fader control.
- Ultra smooth slide control for CROSSFADER function.
- Slide switch for selecting the desired crossfader curve i.e. Flat or Steep.
- Master stereo balanced output through 6.3mm phone jacks
- Booth and Rec stereo outputs through RCA sockets.
- Mono Subwoofer output with two frequencies of 120 & 180Hz (selectable).
- Stereo headphone output with CUE volume control.
- CUE MIX switch for selecting between BLEND & SPLIT mode.
- Independent volume controls for MASTER, BOOTH, SUB and CUE outputs.
- Individual 12 segment LED array for indicating LEFT & RIGHT output levels.

SPECIFICATIONS

MIC INPUTS	: 2mV/4.7kΩ
LINE INPUTS (L & R)	: 100mV/10kΩ
DISTORTION	: < 0.08%
FREQUENCY RESPONSE	: 20Hz - 22kHz (-3dB)
OUTPUTS (NOMINAL)	: MASTER: 1V (BAL), BOOTH: 1V (UNBAL), RECORD: 500mV (UNBAL), SUBOUT (Mono): 1V (BAL), Headphones: 200mV@8Ω

TONE CONTROLS	: Bass: -30dB / +15dB at 100Hz; Mid: -30dB / +15dB at 1kHz; Treble: -30dB / +15dB at 10kHz
SUB CROSSOVER FREQUENCIES	: 120Hz and 180Hz (Selectable)
SIGNAL TO NOISE RATIO	: >80dB
CROSSTALK	: < 65dB
TALKOVER	: -15dB attenuation
POWER REQUIREMENTS	: AC: 220-240V 50/60Hz
DIMENSIONS	: W260 × H125 × D310 mm
WEIGHT	: 4.5kg approx.

Design and Specifications are subject to change without notice owing to continuous product up-gradation. Technical specifications are subject to production tolerances. We cannot be held responsible for printing errors, should they occur. AHUJA is a registered trademark of Ahuja Radios in India and other countries. © Copyright Ahuja Radios, 2016. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law. No part of this compilation may be reproduced in any manner or translated without written permission.